

FU-32


ECONOMIC CLAMP-ON 200/5A INDOOR SPLIT CORE CT

The model FU-32 split core ct is a 32mm diameter split-core current transformer offers 333mV, 100mV-2V and 10mA-200mA ,1A or 5A at secondary from sensed primary current (0-600A).

This is a economic split core current transformer, using ABS and Anti-fire cover, it is very easy for installation. It has Low phase shift for power measurement. length of the output lead can be customized. This current transformer is compact and low cost current transformer with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

Features

1. Faster installation;
2. Most cost-effective;
3. Safe and easy installations;
4. High accuracy 0.2%, 0.5%, 1%;
5. CE, UL / EN 61010 - 1 certified;
6. Holding wire diameter: ϕ 32mm;
7. Measurement range up to 600A AC;
8. Ratio's ranging from 60/1A to 600/5A;
9. Small-size, compact size, light-weight;
10. Low phase shift for power measurement;
11. Over-Voltage protection circuit is installed;
12. Output model: Lead output(2.5m)-can be customized;
13. Isolated plastic case recognized according to UL94-V0;

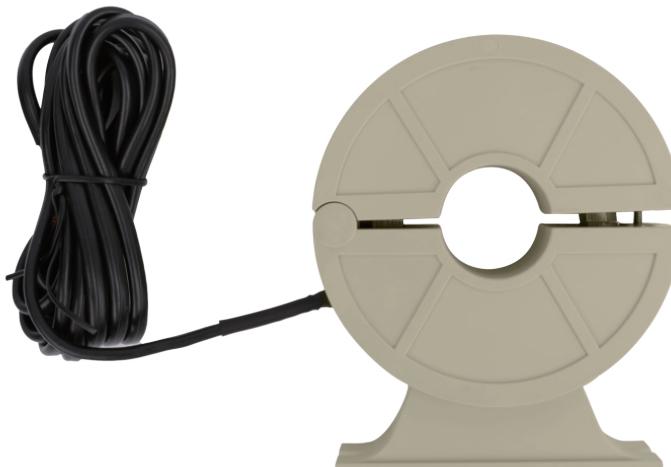

Application

- | | |
|------------------------------------------|----------------------------------------------|
| 1. Power meters; | 2. Energy sub – meter; |
| 3. HVAC & Pumps, etc; | 4. Power Quality Analyzer; |
| 5. Power quality monitoring; | 6. Distributed measurement system; |
| 7. HEMS (Home Energy Management System); | 8. BEMS (Building Energy Management System); |

Parameters

Technical parameters	
Standards	IEC/EN60044-1 & IEC61010-1 & IEC61869-2&ANSI C57.13
Ratio	60:1, 120:1 or 1000:1 , customized
Nominal input current (Primary current)	60A/75A/80A/100A/150A/200A/250A/300A/ 400A/500A/600A
Overload withstand	1.2 times rated current continuously
Accuracy	0.2%, 0.5 %, 1%
System Voltage	720V(0.72kV)
Output signal	50mA-500mA, 1A, 5A AC optional 333mV AC or 100mV-2V optional
Burden	2.5VA-5VA
Frequency range	40 Hz....2000 Hz
Dielectric strength	3 KV 50Hz/60Hz at 1 minute
Output	Standard 2.5 meter cable
Protection Level	3.0V0-P
Installation Category	CAT IV 600V AC IEC/EN 61010-1
Internal structure	Clamp-on Design
Max. jaw opening	32mm
Material	Silicon steel sheets+Enamelled wire+ABS+94V-0
Color	Grey
Mechanical parameters	
Dimensions (WxDxH) (mm)	110 x 130 x 41
Weight (g)	700
Operating conditions	
Operating temperature	-25 to +55°C
Relative Humidity	0-85% non-condensing
Using Environment	Indoor
Altitude	<3000 meters
Condition	No existence of severely begrimed, erosive and radioactive gas in the air. Permission of long-term operation under rated current.

Technical Data

Type	FU-32		
Purpose	Measuring current transformer		
Ratio	Accuracy class		
I ₁ /I ₂	0.2	0.5	1
60A/333mV	YES	YES	YES

100A/333mV	YES	YES	YES
150A/333mV	YES	YES	YES
200A/333mV	YES	YES	YES
300A/333mV	YES	YES	YES
400A/333mV	YES	YES	YES
500A/333mV	YES	YES	YES
600A/333mV	YES	YES	YES
100A/1V	YES	YES	YES
100A/2V	YES	YES	YES
100A/5V	YES	YES	YES
200A/1V	YES	YES	YES
200A/2V	YES	YES	YES
200A/5V	YES	YES	YES
300A/1V	YES	YES	YES
300A/2V	YES	YES	YES
300A/5V	YES	YES	YES
400A/1V	YES	YES	YES
400A/2V	YES	YES	YES
400A/5V	YES	YES	YES
500A/1V	YES	YES	YES
500A/2V	YES	YES	YES
500A/5V	YES	YES	YES
600A/1V	YES	YES	YES
600A/2V	YES	YES	YES
600A/5V	YES	YES	YES
100A/1A		YES	YES
200A/1A	YES	YES	YES
300A/1A	YES	YES	YES
400A/1A	YES	YES	YES
500A/1A	YES	YES	YES
600A/1A	YES	YES	YES
100A/5A			YES
200A/5A		YES	YES
300A/5A		YES	YES
400A/5A		YES	YES
500A/5A		YES	YES
600A/5A		YES	YES

Selection Guide

Model	Primary rated current	Rated load	Secondary output	Aperture (mm)	Description (mm)	Weight (kg)
FU-16	5-200A	$\leq 10 \text{ Ohm}$	333mV,1V, 5V,100mA	$\phi 16$	$38 \times 55 \times 18$	0.06
FU-32	100-600A	$\leq 10\text{VA}$	333mV,1V, 5V, 1A, 5A	$\phi 32$	$110 \times 130 \times 41$	0.7
FU-36	100-600A	$\leq 2.5\text{VA}$	333mV,1V, 5V, 1A, 5A	$\phi 10, \phi 16, \phi 24, \phi 36$	$26 \times 43 \times 27$ $31 \times 50 \times 30$ $43 \times 73 \times 39$ $60 \times 89 \times 43$	0.1, 0.12, 0.2, 0.35
FU-80	100-1200A	$\leq 5\text{VA}$	333mV,1V, 5V, 1A, 5A	$\phi 30, \phi 55, \phi 80$	$88 \times 129 \times 28$ $108 \times 155 \times 28$ $138 \times 193 \times 28$	0.4, 0.55, 0.6
FU-100	300-3000A	$\leq 10\text{VA}$	333mV,1V, 5V, 1A, 5A	$\phi 100$	$170 \times 184.5 \times 41$	1
FU120	200-4000A	$\leq 10\text{VA}$	333mV,1V, 5V, 1A, 5A	$120 \times 130, 120 \times 30$	$166 \times 110 \times 49$ $166 \times 208 \times 49$	1.2, 1.7
FU160	500-5000A	$\leq 20\text{VA}$	1A,5A	160 x 80	144 x 227 x 54	2.8