

GFJSZW-3,6,10WF

FIVE POLE OUTDOOR THREE PHASE VOLTAGE TRANSFORMER


GFJSZW-3WF, GFJSZW-6WF, GFJSZW-10WF high accuracy three phase Outdoor Voltage transformers are designed for outdoor metering and relaying applications. This product is a five leg type has the characteristics of high precision and large capacity, and can be customized according to customer requirements.

The primary and secondary coils are wound using special winding and shielding techniques for improved voltage stress distribution. Each coil is carefully insulated with mylar film to provide a high dielectric medium between layers. The completed winding structure and double-loop cores are assembled to a support frame.

It can be used for medial voltage AIS, or can be used for medial voltage switchgears. They can operate in all kinds of environments (such as wide range temperature (-50~70 °C), high altitude, high humidity, high pollution or salt). This model GFJSZW-3,6,10WF outdoor voltage transformer is also as voltage source to supply 220V voltage. Strictly Comply IEC60044-2; IEC 61869-1,3; ANSI/IEEE C57.13.

Features


1. Weight:155KG;
2. Five pole design;
3. High quality silicon steel;
4. Secondary voltage: (KV) $0.1\sqrt{3}$
5. 3KV 6KV 10KV 12KV Outdoor using;
6. Accuracy class : 0.2, 0.5, 1, 3, 3P, 6P;
7. Surface creepage distance: 570mm;
8. Material:Epoxy Resin & silicon rubber;
9. Rated voltage primary (KV): $10/\sqrt{3}$, $6/\sqrt{3}$, $3/\sqrt{3}$
10. Reasonable structure and robust construction;
11. Excellent short circuit and thermal withstand capabilities;
12. IEC60044-2, IEC 61869-1,3 & ANSI/IEEE C57.13 Standards;
13. Convenient installation, suitable for installation in any location;

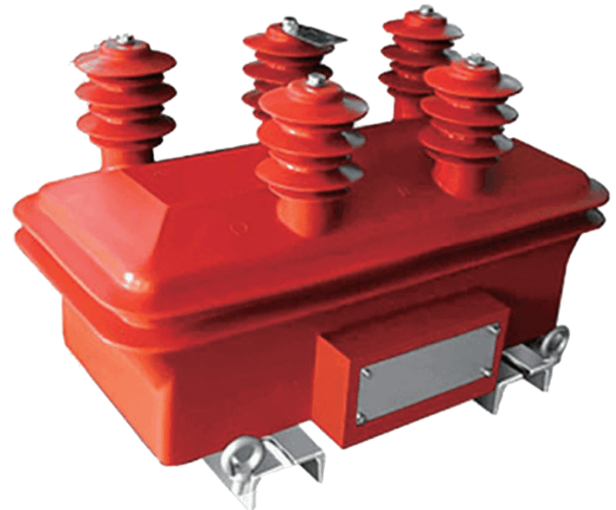

Applications

- | | | |
|-------------------|--------------------------|--|
| 1. Rail way; | 2. Power Meter; | 3. Measuring instrument; |
| 4. Coal Mine; | 5. Power station; | 6. Electric Power Bureau; |
| 7. Power plant; | 8. Oil, gas company; | 9. MV Power Quality Analyzer; |
| 10. Energy meter; | 11. Distribution system; | 12. Industrial and mining enterprises; |

Outline drawing

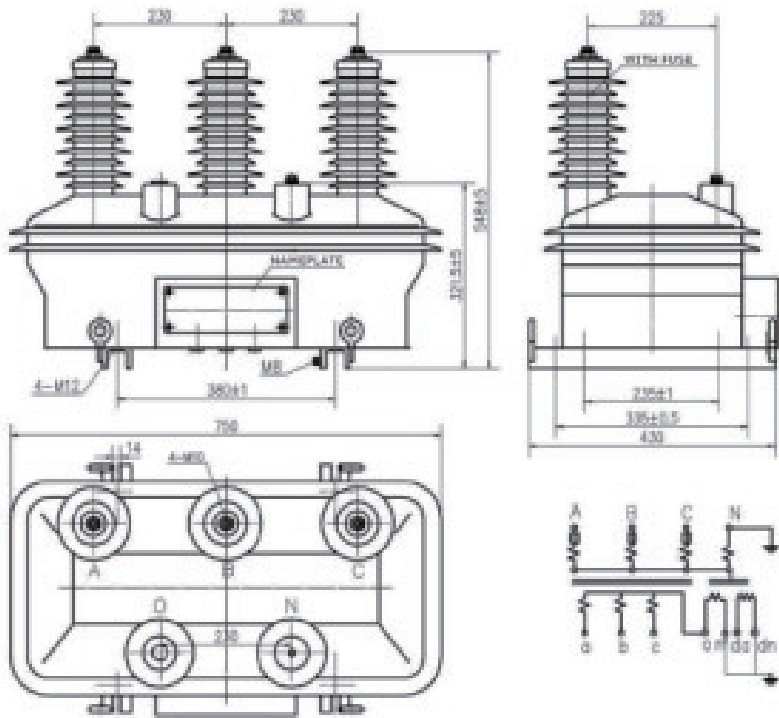

Parameters

Technical parameters	
Standards	IEC60044-2; IEC 61869-1,3; ANSI/IEEE C57.13; GB20840-2013
Rated Voltage	12KV, 11KV, 10KV, 6KV, 3KV
Rated load	≤3×600VA
Secondary voltage output	100V, 110V, 120V, 220V, 240V
Rated frequency	50Hz or 60Hz
Cosφ	0.8 (lag)
Phase number	Three phase
Class	0.2, 0.5, 1, 3, 3P, 6P
Rated insulation level	12/42/75KV, 7.2/32/60KV
With fuse	Yes, 0.5A
Using type	Outdoor
Application	Measurement and Protection
Class of pollution	IV
Mechanical parameters	
Material	Epoxy resin + silicone sleeve
Weight (kg)	155

Operating conditions

Operating temperature	-40°C to +60°C
Daily average temp	<+40°C
Storage temperature	-50°C to +70°C
Altitude	<3000 meters
Condition	No existence of severely begrimed, erosive and radioactive gas in the air. Permission of long-term operation under rated current.

Technical Data

Model	Rated voltage ratio(V)	Accuracy class and Rated secondary output(VA)	Limited output (VA)	Rated insulation level(KV)	Surface creepage distance (mm)	Primary fuse (A)	Weight (KG)
GFJSZW-3WF	3000/ $\sqrt{3}$ 100/ $\sqrt{3}$ /100	0.2/6P(3P)---3×30/100 0.5/6P(3P)---3×60/100 1/6P(3P)---3×100/100 3/6P(3P)---3×200/100	3×600	3.6/23/40	570	0.5	155
GFJSZW-6WF	6000/ $\sqrt{3}$ 100/ $\sqrt{3}$ /100			7.2/32/60			
GFJSZW-10WF	10000/ $\sqrt{3}$ 100/ $\sqrt{3}$ /100			12/42/75			
GFJSZW-6WF	6000/ $\sqrt{3}$ 100/ $\sqrt{3}$ 100/ $\sqrt{3}$ /100	0.2/0.2/6P(3P)--- 3×15/3×15/100	3 × 200	7.2/32/60		0.5	
GFJSZW-10WF	10000/ $\sqrt{3}$ 100/ $\sqrt{3}$ 100/ $\sqrt{3}$ /100	0.2/0.5/6P(3P)--- 3×15/3×15/100	3 × 200	7.2/32/60		0.5	